Walk-in Bath 30" x 51" Soaking Tub, Air Spa And Whirlpool

☐ 3051.110.SXX Soaking Tub

- Acrylic with fiberglass reinforcement.
- Free standing metal support frame with five adjustable leveling feet
- Easy access, powder coated aluminum door system
- Contoured, built-in seat.
- Built-in grab bar and textured bottom.
- Faucet / accessory deck areas.
- Color match cable driven drain assembly.

☐ 3051.110.WXX Whirlpool system

- Electronic control with timer.
- 1 HP variable flow pump system.
- 12 adjustable massage jets with
- Automatic Tub Cleaning System Ozone.

☐ 3051.110.AXX Air Spa system

- Electronic control with timer.
- 1 HP variable flow heater blower.
- Multiple seat and floor air injectors.
- Automatic purge cycle

☐ 3051.110.CXX Combo system

Combines Whirlpool And Air System

Nominal Dimensions

30" x 51" x 37 1/2"

Compliance Certifications

- ETL INTERTEK SEMKO
- IAPMO USPC
- ANSI Z 124.1.2 –for Plastic Bathtubs
- ASME A112.19.7 Whirlpool Appliances
- ASME A112.19.15 –for Walk-in Bathtubs
- CSA B-45.5 Canadian Plumbing Fixtures



To Be Specified – Required

☐ Drain Configuration: Left (L) Or Right (R)

 \Box Color: White (W) Or Linen (L)

☐ Faucet

☐ Quick DrainTM: 9QUD

☐ Whirlpool Heater*: 9ILH (Whirlpool System Only)

☐ Chromatherapy: 9CTP

☐ Neck Rest: 9NR

☐ Tub Extender: 9EXT (specify color)

* NOTE: The whirlpool heater is designed to maintain water temperature during operation. It will not heat cold water to desired bathing temperature

SEE REVERSE FOR ROUGHING –IN DIMENSIONS AND PRODUCT SPECIFICATIONS

American Standard

NOTES:

TUB IS SUPPORTED BY THE FRAME AND FIVE INTEGRATED ADJUSTABLE FEET, NO ADDITIONAL SUPPORT IS REQUIRED.


REFER TO INSTALLATION INSTRUCTIONS SUPPLIED WITH TUB FOR ADDITIONAL INFORMATION.


FIXTURES NOT INCLUDED AND MUST BE ORDERED SEPARATELY.

PROVIDE SUITABLE REINFORCEMENT TO SUB FLOOR FOR ALL SUPPORTS.

IMPORTANT:

Dimensions of fixtures are nominal, may vary and are subject to change or cancellation. No responsibility is assumed for use of superseded or voided leaflet

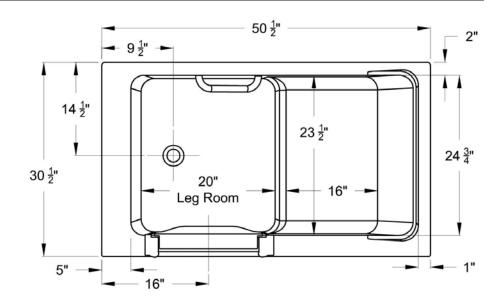

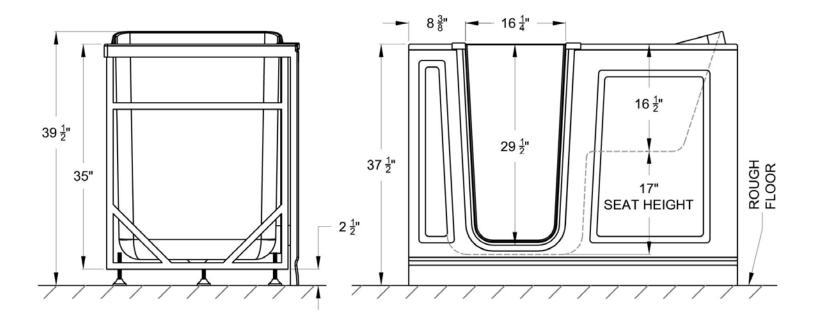

GENERAL SPECIFICATIONS FOR 3051.110.XXX WALK-IN BATH TUB		
INSTALLED SIZE	51 x 30-1/2 x 37-1/2 ln. (1295 x 775 x 950 mm)	
WEIGHT	190 Lbs. (86 kg)	
WEIGHT w/ WATER	690 Lbs. (313 kg)	
OPERATING GAL.	60 Gal. (227 L.)	
FLOOR LOADING	64 Lbs/Sq. Ft (312 Kgs/Sq. m.)	
(PROJECTED AREA)	,	
CUBE (FT ³)	33.8	